

Model: C300 D5
 Frequency: 50
 Fuel Type: Diesel

» Generator set data sheet

300 kVA Standby



Our energy working for you.™

| Fuel consumption | Standby | | | | Prime | | | |
|------------------|-----------|-----|------|------|-----------|-----|------|------|
| | kW (kVA) | | | | kW (kVA) | | | |
| Ratings | 240 (300) | | | | 220 (275) | | | |
| Load | 1/4 | 1/2 | 3/4 | Full | 1/4 | 1/2 | 3/4 | Full |
| US gph | 4.9 | 8.8 | 13.2 | 18.0 | 4.1 | 7.4 | 11.0 | 15.1 |
| L/hr | 18 | 34 | 50 | 68 | 16 | 28 | 42 | 57 |

| Engine | Standby rating | Prime rating |
|--------------------------------|-------------------------------------|--------------|
| Engine manufacturer | Cummins | |
| Engine model | QSL9G5 | |
| Configuration | 4 Cycle; In-line; 6 Cylinder Diesel | |
| Aspiration | Turbocharged and Charge Air Cooled | |
| Gross engine power output, kWm | 310 | 268 |
| BMEP at set rated load, kPa | 2785 | 2413 |
| Bore, mm | 114 | |
| Stroke, mm | 145 | |
| Rated speed, rpm | 1500 | |
| Piston speed, m/s | 7.2 | |
| Compression ratio | 16.8:1 | |
| Lube oil capacity, L | 26.5 | |
| Overspeed limit, rpm | 1800 ±50 | |
| Regenerative power, kWm | 26 | |
| Governor type | Electronic | |
| Starting voltage | 24 Volts DC | |

| Fuel flow | |
|---------------------------------------|-----|
| Maximum fuel flow, L/hr | 165 |
| Maximum fuel inlet restriction, mm Hg | 152 |
| Maximum fuel inlet temperature (°C) | 70 |

| Air | | |
|------------------------------------------------------|------|------|
| Combustion air, m ³ /min | 20.3 | 18.7 |
| Maximum air cleaner restriction, mm H ₂ O | 635 | |

| Exhaust | Standby rating | Prime rating |
|---------------------------------------------------------|----------------|--------------|
| Exhaust gas flow at set rated load, m ³ /min | 31.1 | 29.2 |
| Exhaust gas temperature, °C | 560 | 500 |
| Maximum exhaust back pressure, mmHg | 76 | |

| Standard set-mounted radiator | | |
|-----------------------------------------------------------------------|-------|------|
| Ambient design, °C | 50 | |
| Fan load, KW _m | 9 | |
| Coolant capacity (with radiator), L | 28.6 | |
| Cooling system air flow, m ³ /min @ 12.7mmH ₂ O | 479 | |
| Total heat rejection, BTU/min | 10190 | 8415 |
| Maximum cooling air flow static restriction mmH ₂ O | 12.7 | |


| Weights* | Open | Enclosed |
|---------------------|------|----------|
| Unit dry weight kgs | 2518 | 4095 |
| Unit wet weight kgs | 3157 | 4734 |

* Weights represent a set with standard features. See outline drawing for weights of other configurations

| Dimensions | Length "A" | Width "B" | Height "C" |
|--------------------------------------|------------|-----------|------------|
| Standard open set dimensions, mm | 3135 | 1100 | 1928 |
| Enclosed set standard dimensions, mm | 4248 | 1360 | 2216 |

Genset outline

Open set

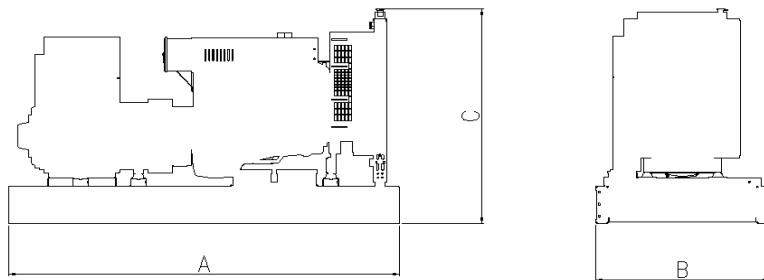

Enclosed set



Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Our energy working for you.™

www.cumminspower.com

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation.

APSB-1154-07 (9/07)



Alternator data

| Feature code | Connection ¹ | Temp rise degrees C | Duty ² | Alternator | Voltage |
|--------------|-------------------------|---------------------|-------------------|------------|----------|
| - | Wye, 3 Phase | 125/105C | S/P | HC4D | 380-415V |

Ratings definitions

| Standby: | Limited Time Running: | Prime (unlimited running time): | Base Load (Continuous): |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514. | Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power is in accordance with ISO 8528. | Applicable for supplying power to varying electrical load for unlimited hours. Prime Power is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514. | Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous power in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514. |

Notes:

- Limited single phase capability is available from some three phase rated configurations. To obtain single phase rating, multiply the three phase kW rating by the single phase factor. All single phase ratings are at unity power factor.
- Standby (S) and Prime (P) ratings.

Formulas for calculating full load currents:

Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.732 \times 0.8}$$

Single phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Cummins Power Generation

Asia Pacific

10 Toh Guan Road #07-01

TT International Tradepark

Tel: (65) 6417 2388

Fax: (65) 6417 2399

E-Mail: cpg.apmktg@cummins.com

Our energy working for you.™

www.cumminspower.com

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation.

APSB-1154-07 (9/07)

